


DVI-FM500 FIBER Sender-Receiver DVI EXTENDERS (DVI TO FIBER-FIBER TO DVI)

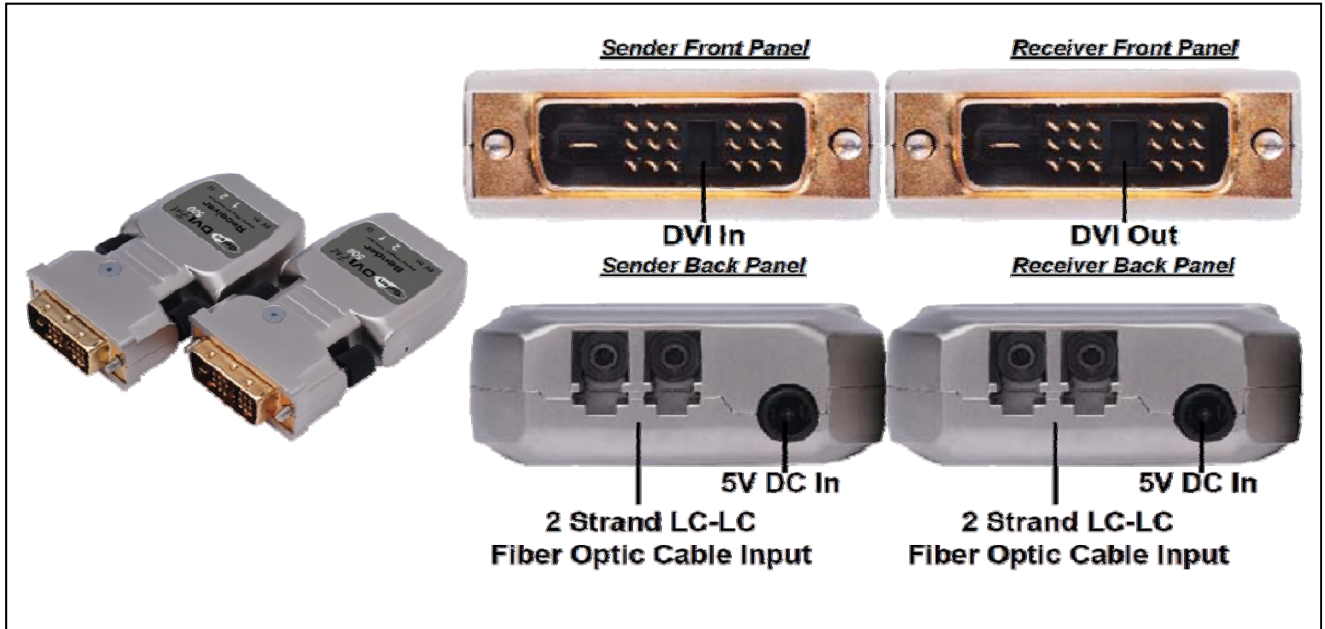

Technical Information

Maximum Single Link Resolution : WUXGA (1920x1200)
 Operating Temperature: 0°C to +50°C
 Storage Temperature: -10°C to +85°C
 Operating Humidity : 5% to 85%
 Formats Supported: Supports DVI 1.0 and DDC2B via virtual DDC
 Default EDID UXGA (1600x1200)
 Dimensions 25,4*15,2*50,8mm (W/H/D)
 Shipping Weight: 453gr.

Product Information

- Extends resolutions up to WUXGA (1920x1200) @60 Hz up to 5,000 feet away
- Immune to EMI (electromagnetic interference) thanks to all-fiber signal transmission media
- Automatic EDID Programming feature enables quick and correct sync of source to display
- Compact Sender and Receiver units install in minutes
- Supports single- and multi-mode fiber optic cable types

Disclaimer: Changes in the data may have been made by the manufacturer without notice.