


HD/SD 4-Channel Analog Audio Embedder/Disembedder

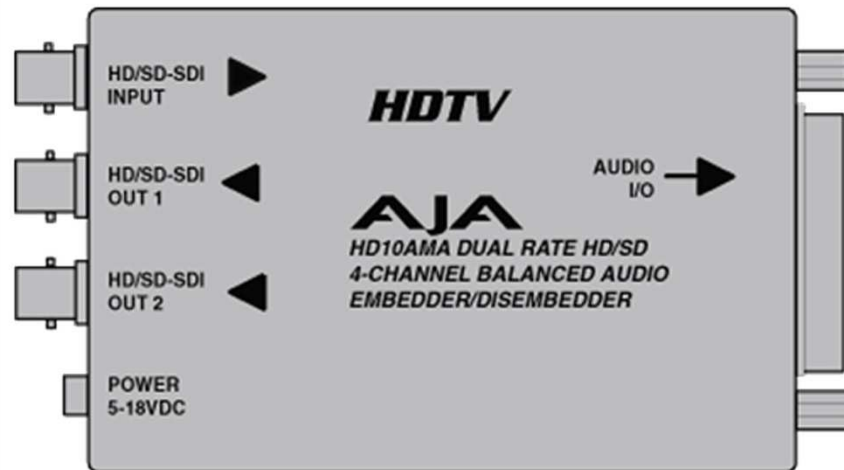

**Technical Information**

Formats : HD SMPTE 292/296M / SD SMPTE 259M  
(Automatic Configuration)

Video Input: HD-SDI or SDI BNC

Video Outputs: HD-SDI or SDI BNC x2

Audio Inputs : 4 x Balanced Analog Audio, XLR

Audio Outputs: 4 x Balanced Analog Audio, XLR

Audio Levels: See "Output Level Selection Matrix"

Audio Converters: 24 bit

Embedded Audio

SMPTE 272M/299M, 24 bit, 48KHz synchronous

User Controls

External Dipswitch

Embedder: on/off, Ch pairs 1/2 - 3/4

Input group: select 1-4

Output Group: Select 1-4

Audio Level: Pro/Consumer, High/Low

Power: +5-18VDC, 5 watts.

Power Supply Required

Size: 47 x 79 x 25 mm

**Product Information**

- Dual rate HD-SDI/SDI Embedder/Disembedder

- 4-Channel Balanced Analog Audio I/O

- Supplied XLR breakout cable

- HD-SDI/SDI input, 2 HD-SDI/SDI outputs

- Dipswitch configuration

- 5-18VDC Power

**Disclaimer:** Changes in the data may have been made by the manufacturer without notice.

Centas Konferens-TV AB  
www.centas.se  
info@centas.se

Stockholm  
+46 8 724 04 00  
stockholm@centas.se

Malmö  
+46 40 14 38 00  
malmo@centas.se

Göteborg  
+46 31 84 01 00  
goteborg@centas.se