


Product sheet

Art #:2516

SANYO

PLC-XU105

MULTIMEDIAPROJECTOR 1024*768 4500 ANSILUMENS

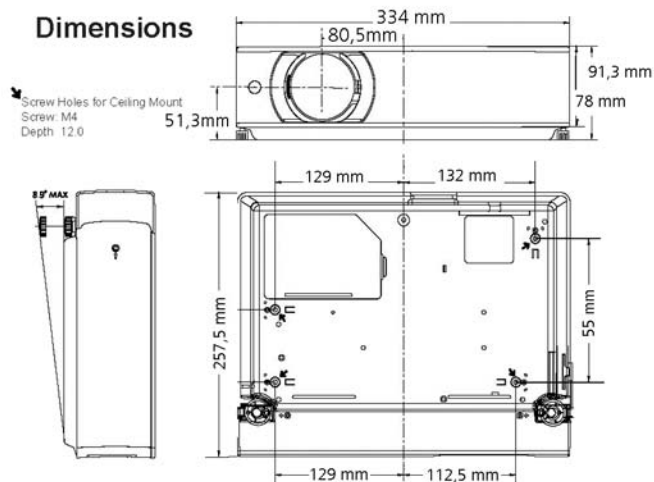

Technical information

Panel 3 x 0.8 " TFT p-Si (4:3), micro lens
 Resolution in pixels 1,024 x 768 (XGA)
 Brightness 4500 ANSI lumens
 Lamp life 3000 h (eco mode) / 2500 h (normal mode)
 Fan noise 30 dB (eco mode) / 34 dB (normal mode)
 Contrast ratio 500 : 1
 Bandwidth/Frequency Bandwidth: 140 MHz
 Hori,Vert, Frequency: 15 - 100 kHz, 50 - 100 Hz
 Colour systems PAL, SECAM NTSC & 4.43, PAL-M/N
 Keystone correction vertical +/- 40°
 Up/Down ratio Up/Down Ratio 9:1 (Fixed U/D Ratio)
 HDTV compatibility 480i, 480p, 575i, 575p, 720p & 1,080i
 Computer compatibility U-XGA, S-XGA, S-XGA+, W-XGA, XGA, S-VGA, VGA & Mac
 Operating Temperature 5°C - 35 °C
 Storage Temperature -10°C - 60 °C
 Dimensions (W x H x D) 334 x 93 x 257 mm
 Weight (Net) 3.5 kg
 Power consumption 266 W (eco mode) / 302 W (normal mode)
 12 W (stand-by mode)
 Voltage 100 - 240 V

Product information

- ▣ Brightness: 4,500 ANSI lumens
- ▣ Light weight of only 3.5 kg
- ▣ Resolution: 1,024 x 768 (XGA)
- ▣ Contrast ratio: 500 : 1
- ▣ Wide angle lens with 1,6 optical zoom
- ▣ Throwing ratio:1:15-1:85
- ▣ Direct Power On/Off, MyLogo Function
- ▣ 360° projection possible

Disclaimer: Changes in the data may have been made by the manufacturer without notice.

Centas Konferens-TV AB
 www.centas.se
 info@centas.se

Stockholm
 +46 8 724 04 00
 stockholm@centas.se

Malmö
 +46 40 14 38 00
 malmo@centas.se

Göteborg
 +46 31 84 01 00
 goteborg@centas.se